

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 July 2003 (10.07.2003)


PCT

(10) International Publication Number
WO 03/056411 A1

- (51) International Patent Classification: G06F 1/16
Hanyang sujung APT, Gawnjeum-dong, Buk-gu, 702-755 Daegu (KR).
- (21) International Application Number: PCT/KR02/01431
- (22) International Filing Date: 27 July 2002 (27.07.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2001/85858 27 December 2001 (27.12.2001) KR
- (71) Applicant (for all designated States except US): LG ELECTRONICS, INC. [KR/KR]; 20, Yoido-dong, Youngdungpo-gu, 150-875 Seoul (KR).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): LEE, Gang-Hoon [KR/KR]; 203-1004 Poongrim APT, Hyunggok 1-dong, 730-777 Gumi (KR). KIM, Hong-Ki [KR/KR]; 216-402
- (74) Agent: HAW, Yong-Nok; 8th Fl. Songchon Bldg. 642-15 Yoksam-dong, Kangnam-ku, 135-080 Seoul (KR).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GI, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,

[Continued on next page]

(54) Title: HINGE STRUCTURE FOR FLAT VISUAL DISPLAY DEVICE

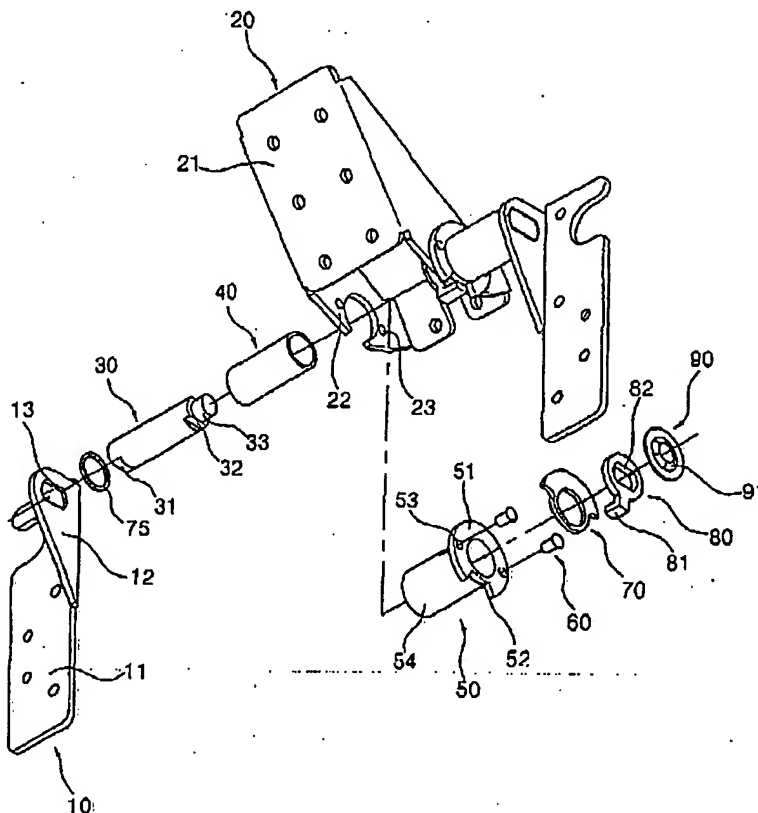

(57) Abstract: Disclosed is a hinge structure for a flat visual display device. The hinge structure comprises: a fixed plate and pivotal plates respectively fastened to the flat visual display device and a supporting portion for straightening the flat visual display device; rotation shafts with first ends placed in the side of the fixed plate and second ends placed in the side of the pivotal plates, the first or second ends being fixed to allow relative rotational movement between the fixed and pivotal plates; braking members provided around the rotation shafts for applying braking force; and braking housings provided around the braking members and with first fixed ends opposite to the fixed ends of the rotation shaft for applying braking force to faces contacting with the braking members.

WO 03/056411 A1